


P/N: 1020429



Technology Data

Electrical Data		
Impedance	50 Ω	
Dielectric Voltage	500 Vrms	
Insulator	≥ 5000 MΩ	
Frequency Range	20GHz	
VSWR	1.25	
Phase Shift Range	10° /GHz, 0~180° @18GHz	
Mechanical Data		
Durability Time	≥ 500	
Environmental Data		
Temperature range	-55 to +165 °C	
Material Data		
Connector	Material	Plating
Body	Brass	Gold
Center Contact	Beryllium	Gold
Nut	Brass	Cu&Sn&Zn
Threaded Insert	Brass	Cu&Sn&Zn
Insulator	PEI&PTFE	

Mechanical Outline

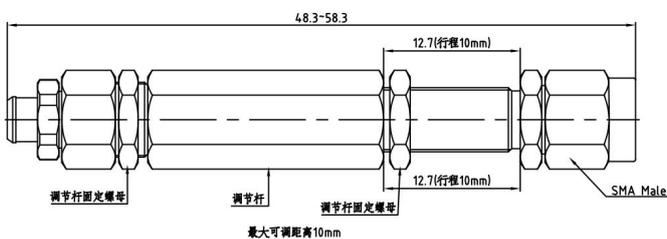

Recommended stripping size

